

XI'AN IR-PERI



PRELIMINARY


MZD800DD120S

Fast Recovery Epitaxial Diode INT -A -PAK

Soft-Fast™ Speed FRED

### Features


- International standard package  
With DBC ceramic base plate
- Planar passivated chips
- Short recovery time
- Low switching losses
- Ultra-soft recovery behaviour
- Industry standard package
- UL recognition pending



**VRRM = 1200V**  
**IFAVM = 800 A**  
**trr = 450ns**

### Benefits

- Antiparallel diode for high frequency switching devices
- Increased operating efficiency
- Direct mounting to heatsink
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders
- Low voltage peaks for reduced protection circuits

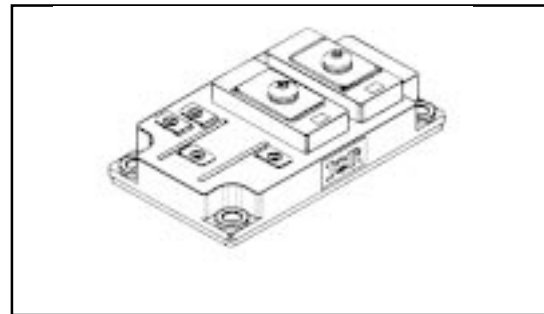

### Absolute Maximum Ratings

Symbol	Test Conditions	Max.	Units
V <sub>RSM</sub> & V <sub>RRM</sub>		1200	V
I <sub>FRMS</sub>	T <sub>C</sub> =75 °C	1120	A
I <sub>FAVM</sub>	T <sub>C</sub> =75 °C; rectangular, d=0.5	800	A
I <sub>FRM</sub>	t <sub>p</sub> <10µs; rep. rating, pulse width limited by T <sub>VJM</sub>	4400	A
I <sub>FSM</sub>	T <sub>VJ</sub> =45 °C; t=10ms (50 Hz),sine	8000	A
	t=8.3ms (60 Hz),sine	9320	A
	T <sub>VJ</sub> =150 °C; t=10ms (50 Hz),sine	7600	A
	t=8.3ms (60 Hz),sine	8400	A
I <sup>2</sup> t	T <sub>VJ</sub> =45 °C; t=10ms (50 Hz),sine	20000	A <sup>2</sup> s
	t=8.3ms (60 Hz),sine	206800	A <sup>2</sup> s
	T <sub>VJ</sub> =150 °C; t=10ms (50 Hz),sine	160000	A <sup>2</sup> s
	t=8.3ms (60 Hz),sine	167400	A <sup>2</sup> s
V <sub>ISOL</sub>	RMS Isolation Voltage, Any Terminal To Case, t=1 min	2500	V
P <sub>D</sub>	T <sub>C</sub> =25 °C	3216	W8
T <sub>J</sub>	Operating Junction Temperature Range	-40 to +150	°C
T <sub>STG</sub>	Storage Temperature Range	-40 to +125	


## Thermal / Mechanical Characteristics

	Parameter	Typ.	Max.	Units
R <sub>θJS</sub>	Thermal Resistance, Junction-to- Sink DC	-	0.039	
R <sub>θJC</sub>	Thermal Resistance, Junction-to- Case DC	-	0.09	°C/W
R <sub>θCS</sub>	Thermal Resistance, Case-to- Sink- Module	0.035	-	
	Mouting Torque, Case-to-Heatsink	-	4.0	N.m
	Mouting Torque, Case-to-Terminal 1,2 & 3	-	3.0	
	Weight of Module	400	-	g

## Electrical Characteristics (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
V <sub>RRM</sub>	Reverse Breakdown Voltage	1200	-	-	V	I <sub>R</sub> =24mA
I <sub>R</sub>	Diode Leaking Current	-	-	24	mA	T <sub>VJ</sub> =25°C V <sub>R</sub> =V <sub>RRM</sub>
		-	-	6	mA	T <sub>VJ</sub> =25°C V <sub>R</sub> =0.8V <sub>RRM</sub>
		-	-	130	mA	T <sub>VJ</sub> =125°C V <sub>R</sub> =0.8V <sub>RRM</sub>
V <sub>F</sub>	Diode Forward Voltage	-	-	1.60	V	I <sub>F</sub> =300A; T <sub>VJ</sub> =125°C
		-	-	1.87	V	T <sub>VJ</sub> = 25°C
		-	-	1.90	V	I <sub>F</sub> =400A; T <sub>VJ</sub> =125°C
		-	-	2.24	V	T <sub>VJ</sub> = 25°C
V <sub>TO</sub>	For power-loss calculations only	-	-	1.18	V	
r <sub>T</sub>		-	-	1.15	mΩ	
trr@T <sub>VJ</sub> =100°C	Diode Reverse Recovery Time	-	450	500	ns	I <sub>F</sub> =550A
I <sub>RM</sub> @T <sub>VJ</sub> = 25°C	Diode Peak Reverse Current	-	-	220	A	V <sub>R</sub> =600V
I <sub>RM</sub> @T <sub>VJ</sub> =100°C	Diode Peak Reverse Current	-	-	330	A	-di/dt=800A/μs

## Case Outline

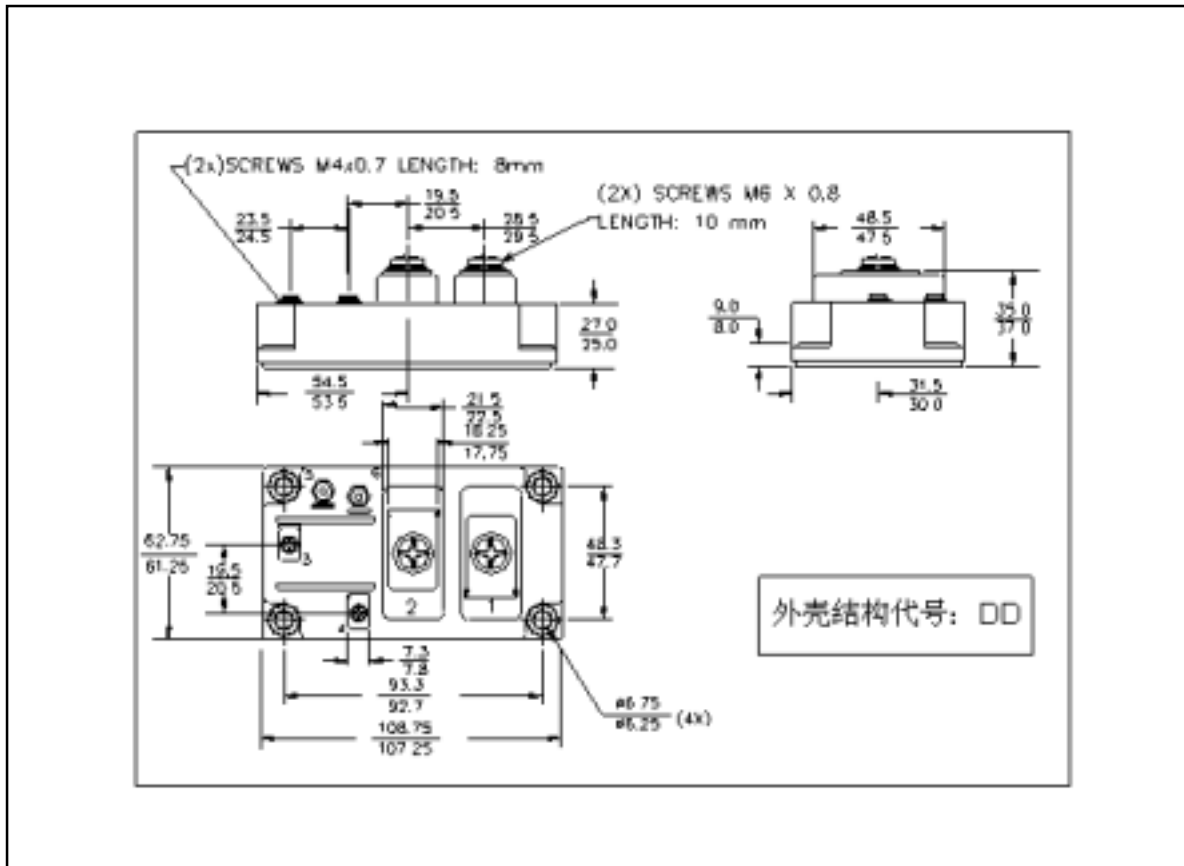

## XIAN IR-PERI CO.,LTD.

94 Zhuque St. Xian 710061,China

Telephone 029-85215895 85217206 85271867

Fax 029-85215896

Email irperi@irperi.com

Internet www.irperi.com